



# WASHING

## HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-18/22 TP2

### CHARACTERISTICS

#### TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT
- Videos on display (ads, instructions, etc.)
- 37 languages
- 8 dosing signals as standard

#### G FACTOR

- High G-Factor: G-FACTOR 450-500

#### EFFICIENCY

- Intelligent consumption
- Optimal loading
- Water Recovery tanks ready: KRS
- Low water consumption

#### VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Drain valve < > Pump
- Wet cleaning features

#### CONNECTIVITY

- IoT - FagorKonnnect standard
- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

#### ERGONOMICS

- Biggest door diameters: Ø460
- Easy opening/closing system for door lock

#### MAINTENANCE

- Hinged control panel: easy and ergonomic access
- Technical menu: statistics for technicians and maintenance with external console (with console option)

#### OTHERS


- Grey skinplate outer casing
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- Electronic control of imbalance with frequency control
- LOADING AID system: water and rotation control
- CB and WRAS approved product. Option ETL
- High spin washers with suspended drum
- High spin washers with suspended drum.

#### OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- Double drain
- Normally closed valve
- WaterFULL FLOW recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align the doorbase at 850mm)
- Plinth for mops with drawer inox/skinplate
- Stainless steel outer casing
- Stainless steel front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Auto unlock kit for the door



	UNI.	LA-18 TP2	LA-22 TP2		
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	20/18	25/22		
Volume	l	180	220		
Diameter	mm	700	700		
Depth	mm	470	560		
<b>GENERAL DETAILS</b>					
Washing speed / speed	r.p.m.	47/1.133	47/1.071		
G Factor	-	500	450		
Maximum force transmitted	KN	3,41 ±1,4	4,12 ±1,4		
Frequency-dynamic force	Hz	16	16		
Noise level	dB	<70	<70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing System / Tilting System	-	Opt./No	Opt./No		
SLUICE option	-	No	No		
<b>DOOR</b>					
Height center door / Height door	mm	765/450	765/450		
Diameter	mm	460	460		
<b>POWER</b>					
Motor	kW	2,2	2,2		
Electric heating power	kW	12	12		
Total electric power (electric model)	kW	12,75	12,75		
Total electric power (hw, steam model)	kW	2,2	2,2		
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM / HOT WATER</b>
Tension 230V - I + N + T	N° x mm2 / A	2x16+T / 63A	2x4+T / 32A	2x16+T / 63A	2x4+T / 32A
Tension 230V - III + T	N° x mm2 / A	3x6+T / 40A	-	3x6+T / 40A	-
Tension 400V - III + N + T	N° x mm2 / A	4x4+T / 32A	-	4x4+T / 32A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	12		12	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kgs/cm <sup>2</sup>	2-4		2-4	
Maximum water consumption	Lit/h	6,6*/8,2**		6,6*/8,2**	
Drain	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	884 / 945		884/945	
Net Depth / Gross Depth	mm	913/1.030		1.003/1.140	
Net Height / Gross Height	mm	1.415 / 1.700		1.415/1.700	
Net weight / Gross weight	kg	360/393		380/413	
Volume	m3	1,63		1,83	

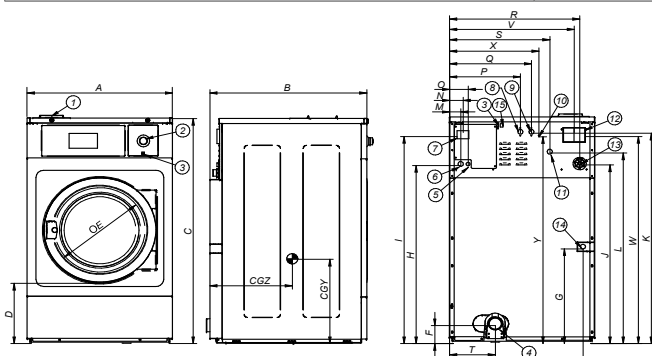

- 1- SOAP DISPENSER
- 2- EMERGENCY STOP
- 3- USB PORT
- 4- DRAIN
- 5- ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6- ELECTRICAL CONNECTION
- 7- MAIN SWITCH
- 8- AUXILIAR WATER INLET
- 9- HOT WATER INLET
- 10- EQUIPOTENTIAL CONNECTION
- 11- COLD WATER INLET
- 12- BLUR OUTPUT / WATER OVERLOAD
- 13- LIQUID SOAP CONNECTION
- 14- STEAM CONNECTION
- 15- ETHERNET PORT

\*ECO program / \*\* Energetic 60°C

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LA-18	mm	884	913	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	702
LA-22	mm	884	1003	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	747