



WASHING

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-35C/45C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

G FACTOR

- High G-Factor: G-FACTOR 450

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Water Recovery tanks ready: KRS
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Drain valve < > Pump
- Wet cleaning features

CONNECTIVITY

- IoT - FagorKonnnect standard
- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø560
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged control panel: easy and ergonomic access
- Technical menu: statistics for technicians and maintenance with external console (with console option)

OTHERS


- Grey skinplate outer casing
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- Electronic control of imbalance with frequency control
- LOADING AID system: water and rotation control
- CB and WRAS approved product. Option ETL
- High spin washers with suspended drum.

OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- Double drain
- Normally closed valve
- Water FULL FLOW: recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to align loading height (door base at 850mm)
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel (LA-35C)
- Maritime voltage for electric models: 440V III 50/60 Hz
- No neutral
- Voltage 230 V III 50/60 Hz
- Coin/token kit
- Auto unlock kit for the door.



	UNI	LA-35C TP2	LA-45C TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	39/35	47/42		
Volume	l	350	450		
Diameter	mm	860	860		
Depth	mm	602	723		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	42,5/966	42,5/966		
G Factor	-	450	450		
Maximum force transmitted	KN	7,36 ±2,45	7,36 ±2,45		
Frequency-dynamic force	Hz	14,3	14,3		
Sound level	dB	<70	<70		
Coin laundry version	-	Yes	No		
Double drain	-	Opt	Opt		
Weighing System / Tilting System	-	Opt/No	Opt/No		
SLUICE option	-	No	No		
DOOR					
Height center door / Height door	mm	885/540	885/540		
Diameter	mm	560	560		
POWER					
Motor	kW	6	6		
Electric heating power	kW	21	21		
Total electric power (electric model)	kW	23	23		
Total electric power (hw, steam model)	kW	6	6		
CONNECTIONS		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	N° x mm2 / A	-	-	-	-
Tension 230V - III + T	N° x mm2 / A	3x16+T - 63A	3x4+T - 32A	3x16+T - 63A	3x4+T - 32A
Tension 400V - III + N + T	N° x mm2 / A	4x6+T 40A	4X1,5+T 16A	4x6+T 40A	4X1,5+T 16A
Steam inlet (Steam mod.)	inch	3/4"		3/4"	
Maximum steam consumption (Steam mod.)	Kg/h	18		18	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm ²	2-4		2-4	
Maximum water consumption	Lit/h	6,6*/8,2**		6,6*/8,2**	
Drain	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	1.095/1.165		1.095/1.165	
Net Depth / Gross Depth	mm	1.184/1.230		1.304/1.480	
Net Height / Gross Height	mm	1.598/1920		1598/1920	
Net weight / Gross weight	kg	750/820		800/870	
Volume	m ³	2,75		3,31	

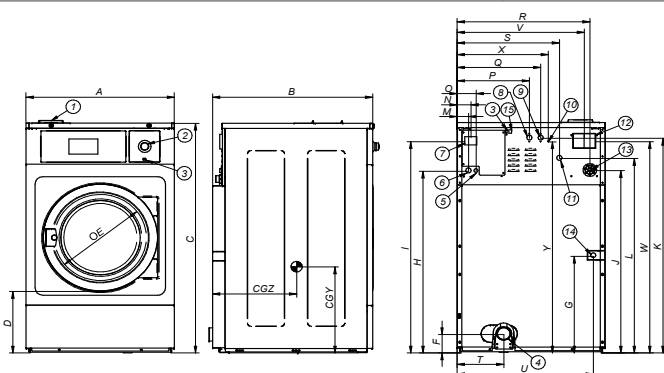

- 1- SOAP DISPENSER
- 2- EMERGENCY STOP
- 3- USB PORT
- 4- DRAIN
- 5- ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6- ELECTRICAL CONNECTION
- 7- MAIN SWITCH
- 8- AUXILIAR WATER INLET
- 9- HOT WATER INLET
- 10- EQUIPOTENTIAL CONNECTION
- 11- COLD WATER INLET
- 12- BLUR OUTPUT / WATER OVERLOAD
- 13- LIQUID SOAP CONNECTION
- 14- STEAM CONNECTION
- 15- ETHERNET PORT

*ECO program / ** Energetic 60°C

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LA-35C	mm	1.095	1.184	1.600	525	560	158	576	1.330	1.498	1.331	1.513	1.417	61	74	101	596	676	976	808	384	1.028	946	1.496	740	1.558	795	732
LA-45C	mm	1.095	1.304	1.600	525	560	158	576	1.330	1.498	1.331	1.513	1.417	61	74	101	596	676	976	808	384	1.028	946	1.496	740	1.558	795	800